



Overview

The simple to install Paxton10 Reader Converter will allow for an easy upgrade path between Net2 and Paxton10, enabling the existing Net2 readers to be used with a Paxton10 system.

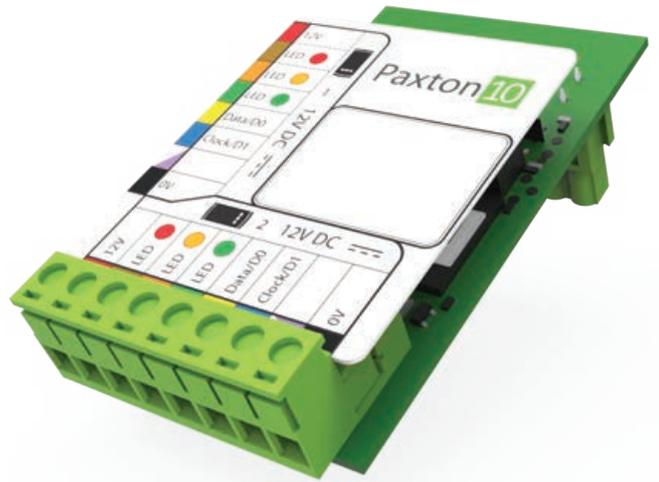

Features

- Adds support of Paxton Net2 Readers, Proximity, Keypad and Keypad Proximity
- Simple installation to either a Paxton10 Door Controller or Paxton10 Video Controller

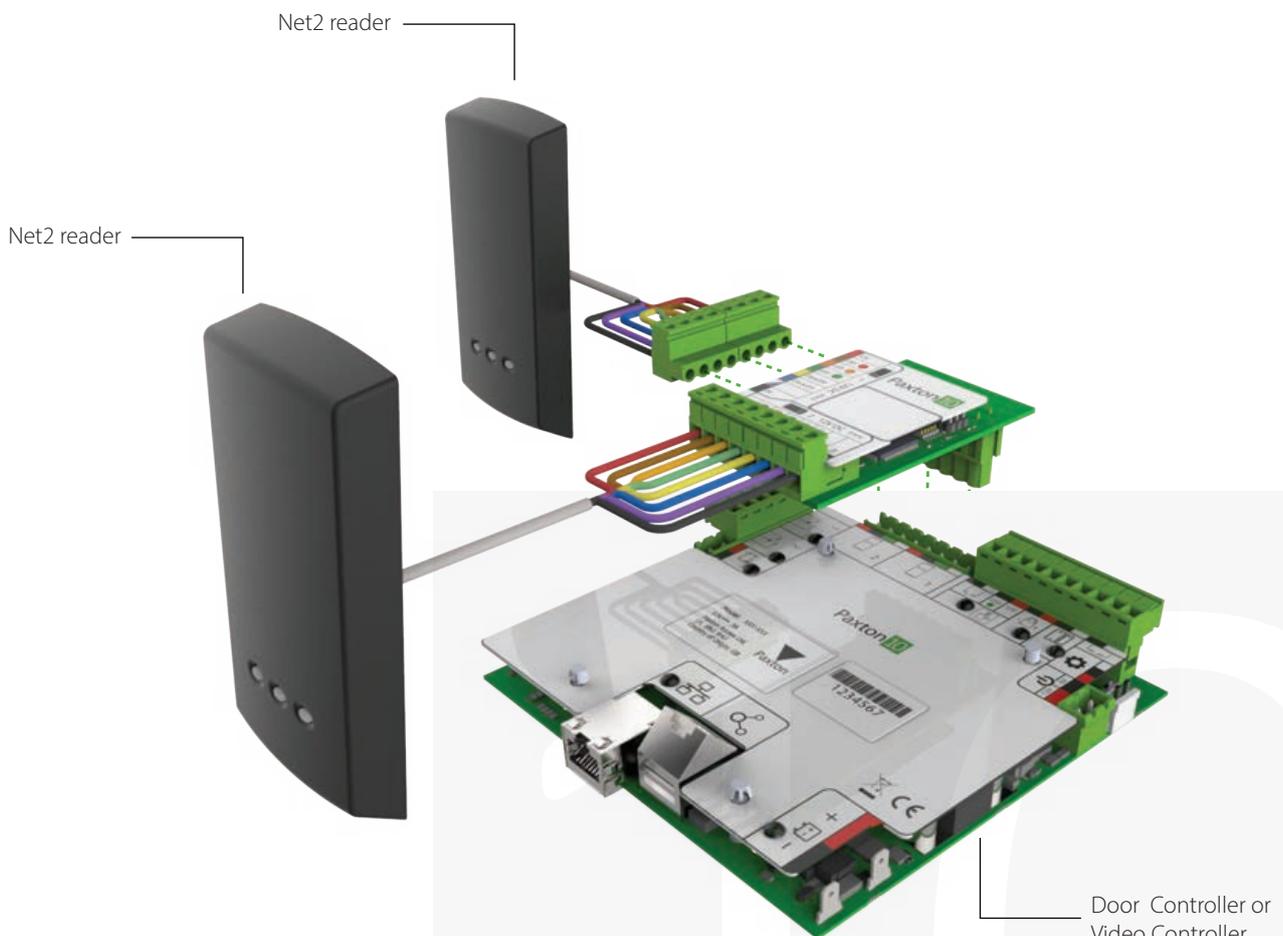



Electrical

Power consumption	300mA (Max)
Power supply to readers	12V dc 100mA



Communication

Data connection to controller	RS485
Data connection to readers	Clock & Data
Un-Supported Readers	313-110-US - Proximity long range reader 595-248-US - Proximity energy saving reader



Hardware

Dimensions (W x H x D)	47mm x 87mm x 29mm 1 ²⁷ / ₃₂ " x 3 ²⁷ / ₆₄ " x 1 ⁹ / ₆₄ "
Number of reader connections	2 Only
Warranty	Paxton 5 year



Environment

Operating temperature	Internal Only +32°F - +113°F
-----------------------	---------------------------------

Certifications: UL 294, FCC 15B

